
element[™] Setup Guide

IEC Power Cable (1 ships with Element) plugs into the IEC Receptacle.

Cat 5 Ethernet Cable plugs into the Ethernet port for connecting Element to a lighting network or RFR.

Make sure to keep the fan and vents clear of any obstructions.

For information about MIDI and Remote Trigger, please see the Eos Family Show Control User Guide.

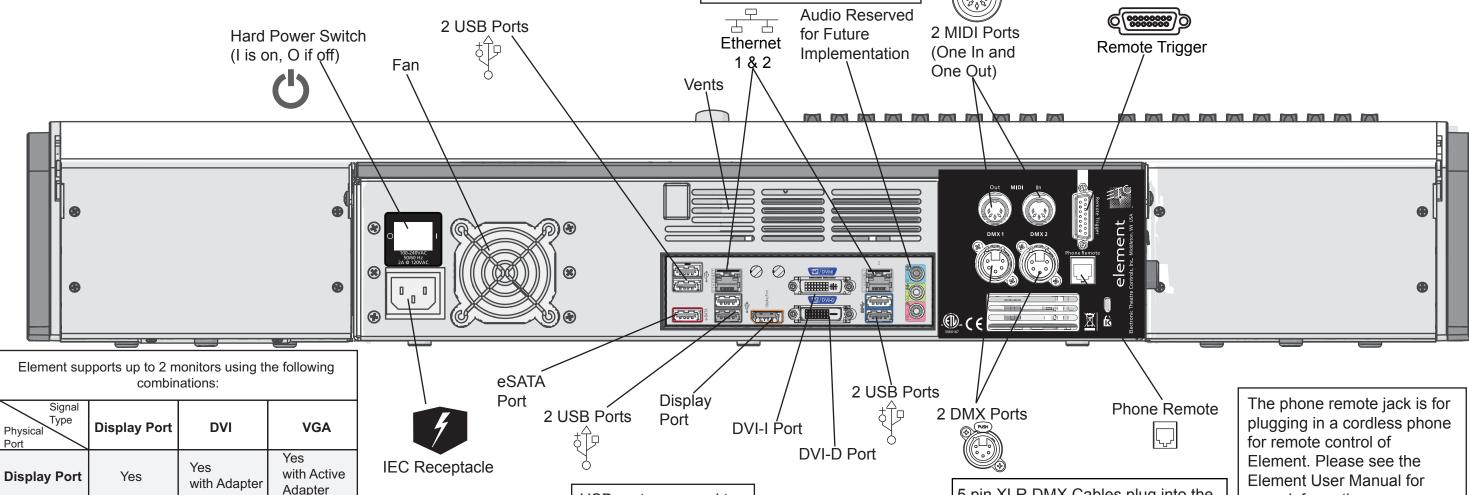



DVI-I Port

DVI-D Port

No

No

Corporate Headquarters ■ 3031 Pleasant View Road, P.O. Box 620979, Middleton, Wisconsin 53562-0979 USA ■ Tel +608 831 4116 ■ Fax +608 836 1736 London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000

Rome, IT ■ Via Pieve Torina, 48, 001569 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +44 (0) 20 8752 8486

Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00

Yes

with Adapter

No

Hong Kong ■ Rm 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325

Service: (Americas) service@etcconnect.com ■ (UK) service@etceurope.com ■ (DE) techserv-hoki@etcconnect.com ■ (Asia) service@etcasia.com

Web: www.etcconnect.com ■ Copyright © 2014 ETC. All Rights Reserved. ■ Product information and specifications subject to change.

4330M2200 ■ RevC ■ 2014-04 ■ ETC intends this document to be provided in its entirety.

Yes

Yes

Multitouch monitors need to be Windows 7 or 8 Compatible.

Page 1

USB ports are used to


flash drives. One additional port is located on

Element's face panel.

connect a keyboard,

mouse, and/or USB

5 pin XLR DMX Cables plug into the DMX ports to connect Element with dimmers, scrollers, moving lights, and other devices.



Element User Manual for more information.