

CS-200F-C5DS3

1 2 3 4 5 6

1	Product Identity
CS	Company Switch

2	Current Rating
200F	200A
100F	100A
60F	60A

Other current ratings available Consult Factory

3	Output Connections
C5D	5 Wire Cam Type and Lugs
C6D	6 Wire Cam Type and Lugs

6 Wire consists of a double neutral configuration



4	Gender
B	Reverse Both
G	Reverse Ground
N	Reverse Neutral
S	Straight

5	Environmental Rating
1	Type 1 - Indoor
3	Type 3R - Outdoor/Raintight




Type 3R units may be used indoors

6	Color/Finish
(blank)	Sand
-BLK	Black, matte

Conduit entry from top only,
at least 1" in from sides

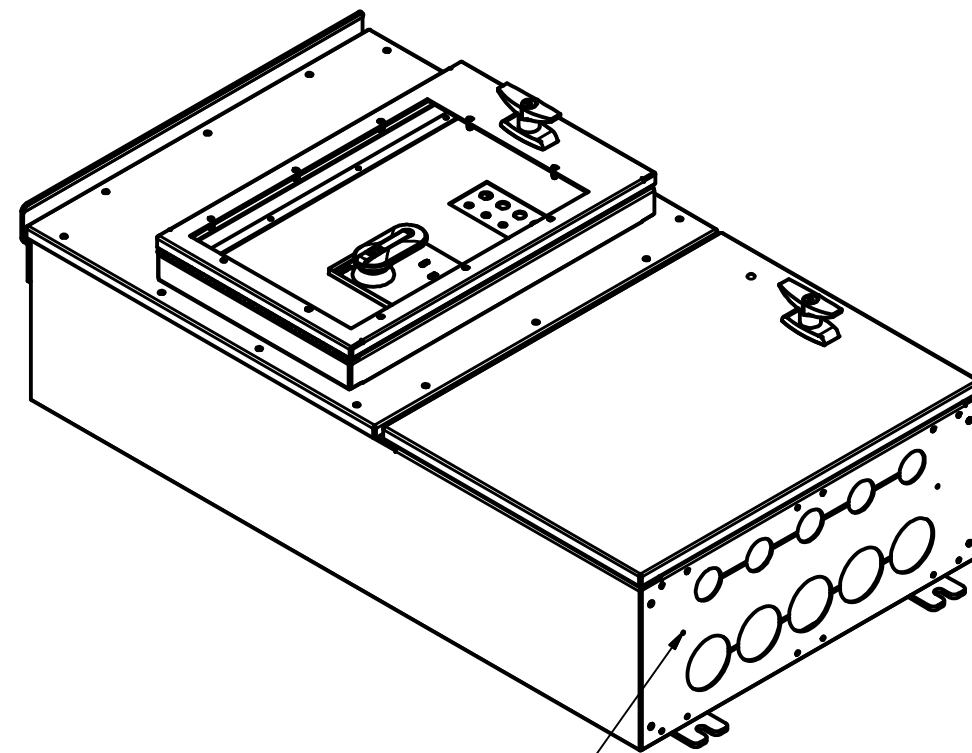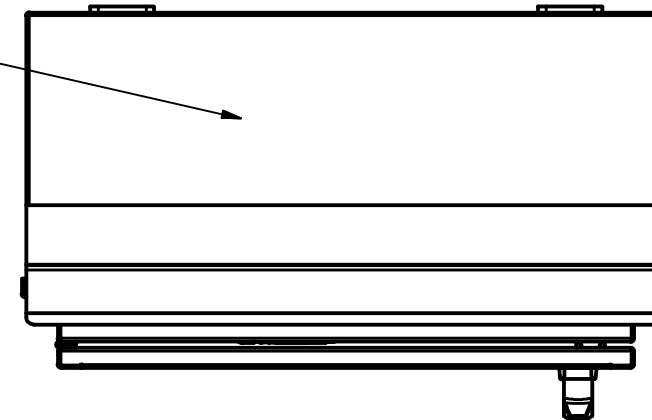


Cover Plate
Removed

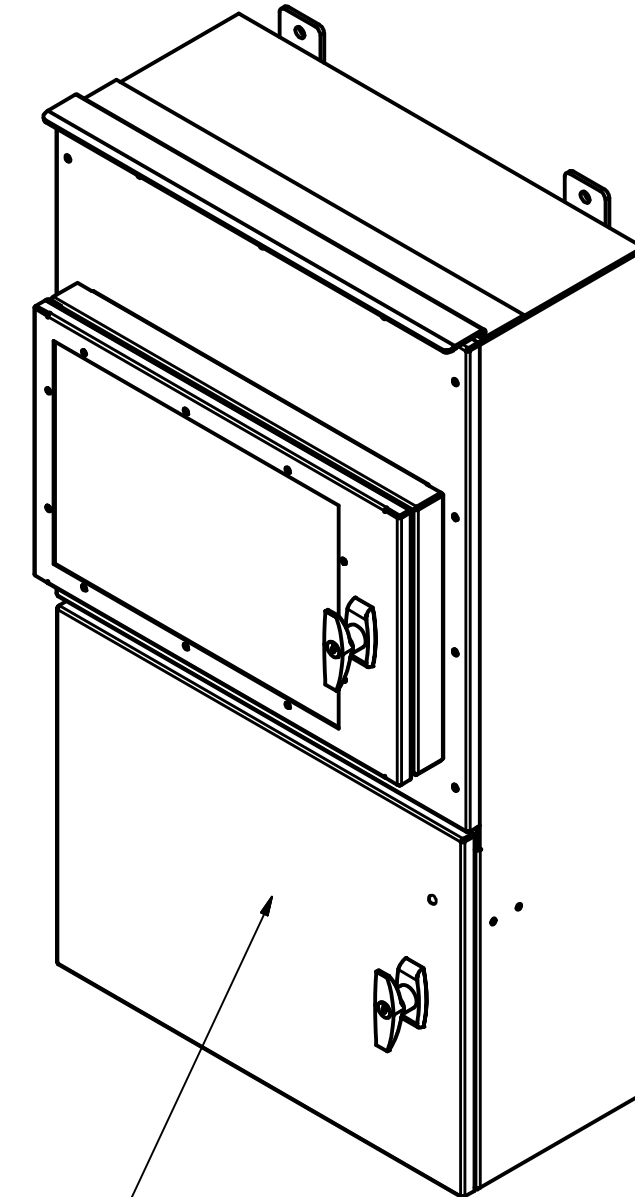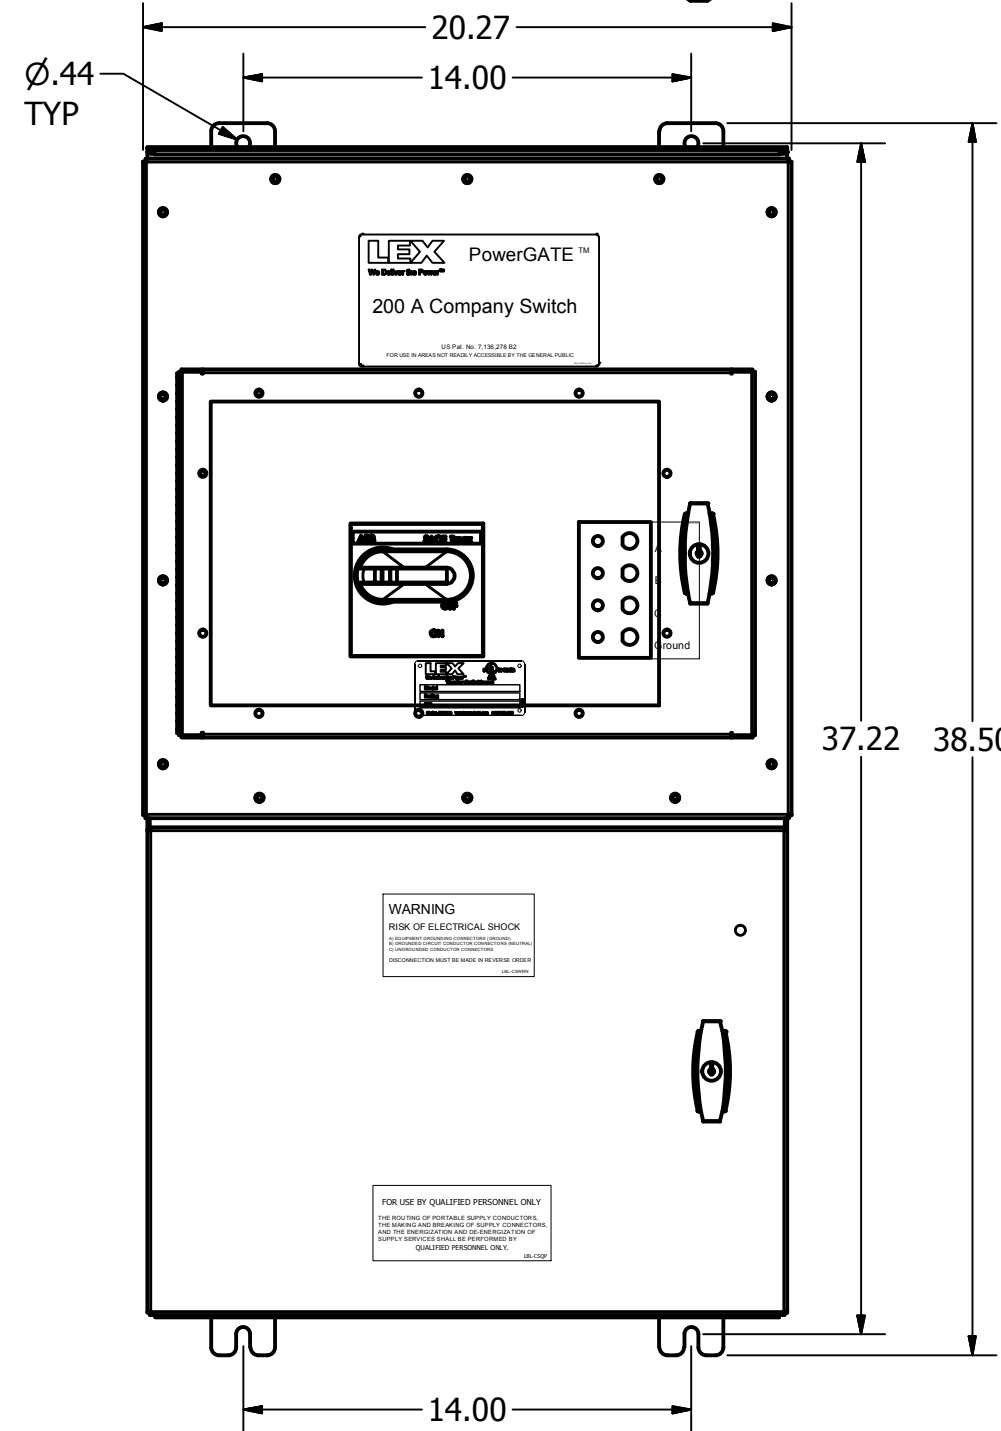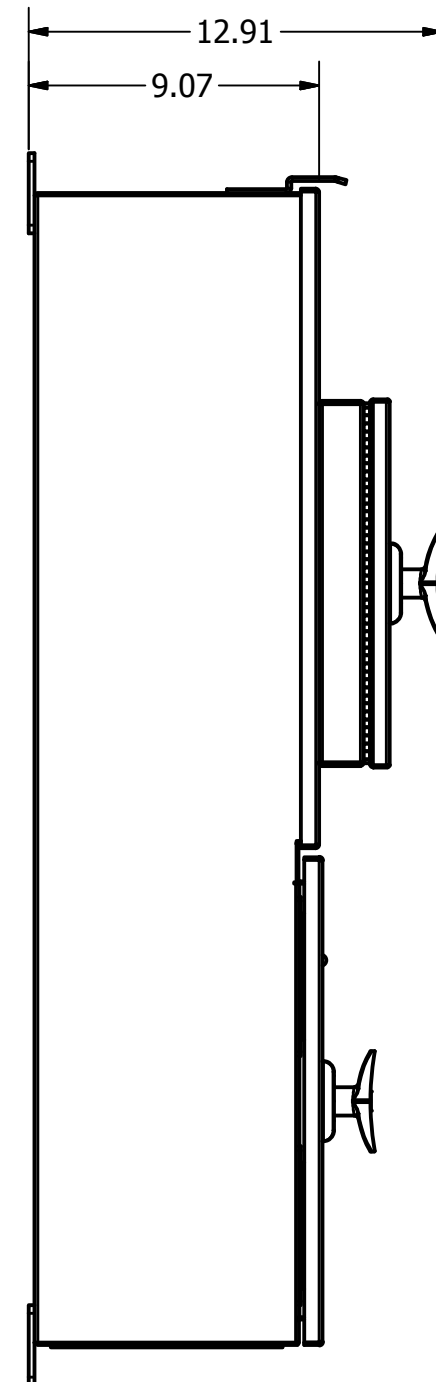

All output connectors are in this
chamber behind a lockable door.
Safety interlock will trip the breaker
when the door is opened to prevent
termination while connectors are live.

Cover Plate

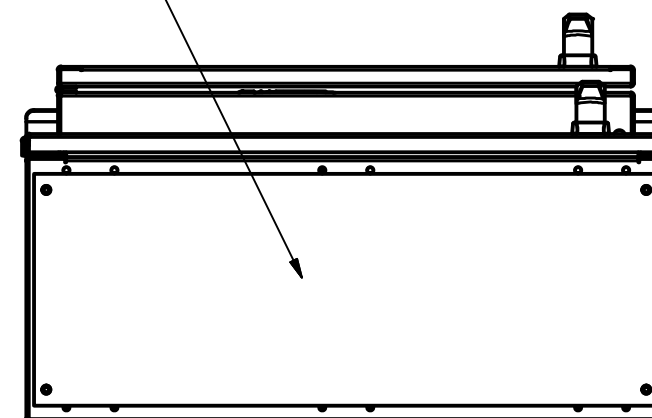

BOTTOM VIEW

Environmental Rating: Type 3R, Outdoor

Dimensions: 20.27W /38.50L/9.33D

Powder Coat Finish: [] Sand or [] Matte Black

Wire range: (1) 350 KCM - 6 AWG per phase

(1) 500 KCM - 4 AWG, Neutral

(1) 500 KCM - 4 AWG, Ground

Wire type: Aluminum/Copper gauged accordingly

Output Connections: (5) Cam Type connectors, Straight

(5) Lugs for bare wire connection, in parallel
with Cam Type connectors

Rating: 208Y/120V, 200A, 50/60Hz

cULus Listed, E227821

Approved By

Position:

Company:

Name:

THE INFORMATION CONTAINED HEREIN
IS PROPRIETARY TO LEX PRODUCTS
CORP AND SHALL NOT BE
REPRODUCED OR DISCLOSED IN
WHOLE OR IN PART OR USED FOR
ANY DESIGN OR MANUFACTURE EXCEPT
WHEN SUCH USER POSSESSES
WRITTEN AUTHORIZATION FROM LEX
PRODUCTS CORP.



LEX PRODUCTS, LLC

11 Forest Parkway, Shelton, CT 06484

TITLE:

PowerGATE™ Company Switch

ENCLOSURE MATERIAL:
14GA CRS

DRAWN BY: RJ
CHECKED BY:

DATE:2011-11-29

PART NUMBER:
CS-200F-C5DS3

REV.
005

©2012 LEX PRODUCTS

QUOTE NO.:

SCALE: 1/8

SHEET 1 OF 1